

LOW COST.
HIGH RETURN.

TS100-1600



Mimaki's unique Core Technologies ensure

UNATTENDED, CONTINUOUS PRINTING OPERATION COMBINED WITH THE VERY HIGHEST IMAGE QUALITY

STABLE PRODUCTION



NCU
Nozzle Check
Unit automatically
checks nozzles
and cleans them
if required.



NRS
Nozzle Recovery
System
automatically
substitutes
defective
nozzles to allow
uninterrupted
operation.



**AUTOMATIC
WIPER**
performs quick and
effective cleaning
of the print head,
keeping the nozzles
in top condition
and reducing daily
maintenance time.



MAPS4
Mimaki Advanced
Pass System
reduces banding
by dispersing ink
drops between
passes.



WFC
Waveform Control
utilises finely
tuned frequencies
to precisely
shape and place
individual ink
drops.



**VARIABLE
DOT**
enables the printer
to print in 3 different
dot sizes to create
high quality images
with smooth
gradations.

HIGH IMAGE QUALITY

MIMAKI TS100-1600 SPECIFICATIONS

TS100-1600		
Print head	On-demand piezo head (2 staggered printheads)	
Print resolution	360 dpi, 600 dpi, 720 dpi, 900 dpi	
Ink	Type / Colour	Sb610 (BL, M, Y, K)
	Package size	1L ink bottle
Maximum print width	1,610mm	
Media	Max. width	1,620mm
	Thickness	Up to 1mm
	Roll diameter	Up to 250mm
	Roll weight	Up to 45kg
Interface	USB2.0 / Ethernet 1000BASE-T	
Power supply	Single-phase (AC100-120V / AC200-240V ± 10%, 50/60Hz ± 1Hz)	
Power consumption	AC100V: 1.44kW or less / AC200V: 1.92kW or less	
Safety standards	VCCI class A, FCC Class A, CE Marking (EMC Directive, Machinery and Low Voltage Directive), CB Certification, RoHS, RCM, EAC, Energy Star	
Operational environment	Temperature: 20-30°C / Humidity: 35-65% Rh (Non-condensing)	
Dimensions (W x D x H)	2,775 x 700 x 1,475mm	
Weight	166kg	

Consumables

Item code	Description	Volume	Remarks
SB610-XX-BA-1	Sb610 dye sublimation ink	1000ml bottle	BL, M, Y, K
C-ML003-Z-BA-1	Flushing liquid 03	1000ml bottle	For flushing of ink lines
C-FL003-Z-22-1	Cleaning liquid 03	220ml cartridge	For maintenance purpose

Options

Item code	Description	Remarks
OPT-J0351	Drying fan 160	Requires drying fan connection kit (OPT-J0512) to install
OPT-J0512	Drying fan connection kit	Required for the installation of Drying Fan 160 (OPT-J0351)
OPT-J0353	Exhaust kit 160	
OPT-0355	Static prevention sheet	
STX-0010	TxLink4 Lite	

Specifications, designs and dimensions in this list may be subject to change without notice due to technical improvements or other modifications.

MEUTS10001-EN

Hybrid Services Ltd. No 3, Gateway, Crewe, CW1 6YY
www.hybridservices.co.uk 01270 501900 info@hybridservices.co.uk

EXPERT PRINTING
MADE EASY

LOW COST. HIGH RETURN.

TS100-1600
DYE SUBLIMATION
PRINTER



Mimaki

The Mimaki TS100-1600 provides a unique opportunity for textile production companies to meet the demands of the rapidly growing sublimation market. Offered at an entry-level price and with an incredible maximum speed of 70m²/h, the TS100-1600 sets a new standard in dye sublimation printing. By delivering the best price/performance ratio in the market, it is an absolute game-changer!

NEW DOT ADJUSTMENT SYSTEM (DAS)

Introducing Mimaki's easy-to-operate Dot Adjustment System (DAS), which automatically performs bi-directional and media feed adjustments. This eliminates the need for manual adjustments, saving time and improving overall productivity.

*DAS may not be compatible with some media such as coloured, transparent, and embossed substrates.



Incorrect bi-directional drop landing position

Overlap / black streaks (Insufficient paper feeding)

Gap / white streaks (Excessive paper feeding)

With DAS



Correct drop landing position and paper feeding ensures the highest print quality

HIGH DENSITY, ECO-CERTIFIED SUBLIMATION INK

Sb610 ink


Newly available in competitively priced 1L bottles, Mimaki's Sb610 inks enable businesses to grow profitably and effectively. ECO PASSPORT certified by Oeko-Tex® (an independent verification process demonstrating the safety for use in sustainable textile production), Mimaki Sb610 inks offer strong environmental credentials and high colour yield.



OEKO-TEX®
CONFIDENCE IN TEXTILES

DOUBLE YOUR PRODUCTIVITY

With a maximum print speed of 70m²/h, the Mimaki TS100-1600 is almost twice as fast compared to our previous sublimation models. It also delivers an average production speed of 36m²/h, setting a new price/performance ratio standard in dye sublimation printing.

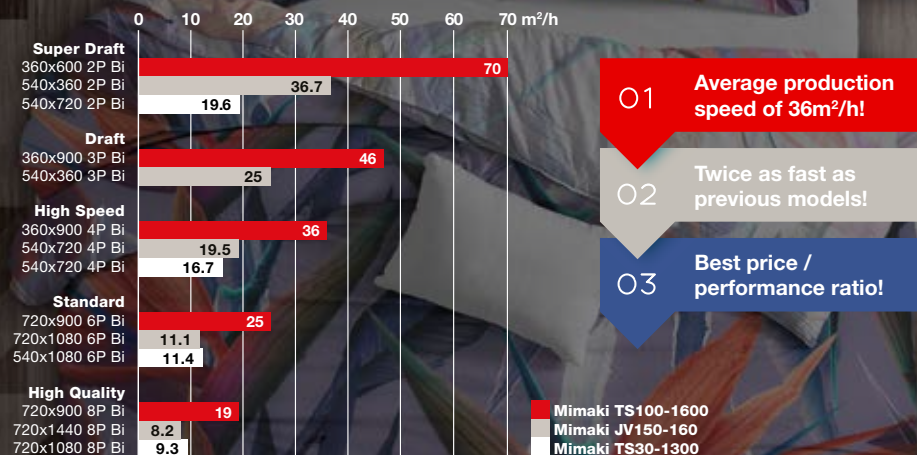

- 01 Average production speed of 36m²/h!
- 02 Twice as fast as previous models!
- 03 Best price / performance ratio!

ADVANCED RIP SOFTWARE **Raster Link 7**

The TS100-1600 comes with Mimaki's user-friendly RIP software, **Rasterlink 7**, as standard, featuring:

1. New HARLEQUIN RIP core for more accurate handling of PDF files with shadows and transparencies.
2. Up to 25% faster processing of complex PDF files.
3. Variable data printing to easily create a series of prints with dynamic variations of texts and photos.
4. Improved user interface and screen efficiency.

POWERFUL TEXTILE RIP SOFTWARE FOR PROFESSIONAL USE

Available as option, the new Mimaki TxLink4 textile RIP software enables a more efficient, seamless textile print production.

TxLink™4 Lite

■ Smoother gradation with 16-bit rendering



TxLink3 8-bit rendering

■ Simultaneous RIP and print of multiple jobs



TxLink4 16-bit rendering

The TxLink4 allows simultaneous RIP processing of up to 8 jobs with various print data.⁽¹⁾

Using the Print Job Pool feature, a large number of copy prints can be done simultaneously on multiple printers with the same model and ink set.⁽¹⁾⁽²⁾

⁽¹⁾ Additional printer licenses corresponding to the number of connected printers are required.

⁽²⁾ Simultaneous RIP does not work if two or more images are arranged in one print job.