

Hybrid UV led inkjet printers with integrated roll-to-roll system

High-speed hybrid 4/6-color + white UV LED-curable inkjet systems with a printing width ranging from 1.6 m up to 3.2 m for indoor and outdoor applications.



# Hybrid Anapurna LED series

The wide-format hybrid Anapurna i LED-series is a perfect fit for sign shops, digital printers, photo labs and mid-size graphic screen printers that want to combine board and roll-to-roll print jobs. The engines print at a width up to 3.2 m and combine excellent quality with high productivity for outdoor and indoor jobs. The hybrid Anapurna's are equipped with UV LED lamps, enabling you to print on a wider media mix and to save energy, costs and time. The white ink function creates possibilities for printing on transparent material for backlit applications or for printing white as a spot color. With the optional automatic board feeder, productivity is increased even more.



Outstanding print quality on backlit applications

### Reliable workhorse

Featuring a robust and industrial engineered concept fit for sustained higher workloads, and incorporating the latest generation of fast-firing print heads, the hybrid Anapurna i-series with UV-LED curing offers fast throughput while also achieving excellent print quality. You will be able to maintain a high print production on all your substrates, satisfying your most demanding customers. Borderless or multiple boards printing increase productivity even more

## A wide range of applications

The Anapurna i LED-series adds more versatility to your business as it expands your range of applications. It produces top-quality prints on uncoated rigid media, such as corrugated boards, rigid plastics, exhibition panels, stage graphics and advertising panels, as well as on roll media such as film, vinyl and paper, banners, canvas and coated textile. It can also be used to print niche products such as wood, DVDs or personalized objects, or to create architectural and interior decoration.

The use of specialty inks and the little heat generated by the LED array passing over the substrate allows you to print on a wider range of materials. As a result, the engines can print on thin heat-sensitive styrene as well as everything from foils and laminates to coated paper, PET, fluted polypropylene, soft foam boards, or industrial film.

# The Anapurna hybrid printer series



Anapurna H1650i LED



Anapurna H2500i LED



Anapurna H2050i LED



Anapurna H3200i LED



# Top quality

Thanks to a reinforced belt drive and shuttle beam, the hybrid Anapurna i LED printers bring a highly accurate dot positioning and thus excellent image quality, which is further enhanced by the gradient and multilayer functionality. The six 12 picolitre color heads (four color heads for the Anapurna H1650i LED) guarantee printing of good solids, fine text reproduction of up to 4 pt, good tonal rendering and low ink consumption. The two 30 picolitre white ink heads will allow you to print white in multiple modes.

# Multiple board and automatic board printing

The Anapurna H2050i and H2500i can have an automatic board feeder added in order to increase productivity substantially. This optional table provides an automated solution for volume printing of small board sizes—up to four boards can be printed in parallel on the Anapurna H2050i LED and up to five boards on the Anapurna H2500i LED. The borderless printing feature makes post-finishing superfluous.


# **UV LED** print technology

Equipped with powerful, air-cooled 16 Watt/cm<sup>2</sup> UV LED lamps for the curing process, the hybrid Anapurna LEDs come with a number of economical, ecological and business-generating benefits:

- LEDs are cool to the touch and have minimal heat output, which is why
  they allow for a broader scope of print applications.
   They enable you to print on heat-sensitive substrates such as thin slides,
  self-adhesive sheets or stretched PVC materials, for example.
- LED lamps can be switched on and off instantly, without any
  degradation of intensity. That means there is no lamp warm-up time
  or delay for shutter motion. The result? Faster operations and higher
  productivity.
- LEDs last for at least 10,000 hours each, which means that dependent on the usage they can last as long as five years or up to a printer's lifetime
- They generate a **consistent output** throughout that period.
- LEDs have a lower energy consumption than mercury bulb lamps, which leads to significant power savings and a higher ROI in the long run.
- As UV LED lamps don't contain mercury, there is no need for mercury disposal or any related costs. Also, LEDs don't produce ozone gas that needs to be extracted by ventilation.



# Designed for the greatest possible deployment and convenience.

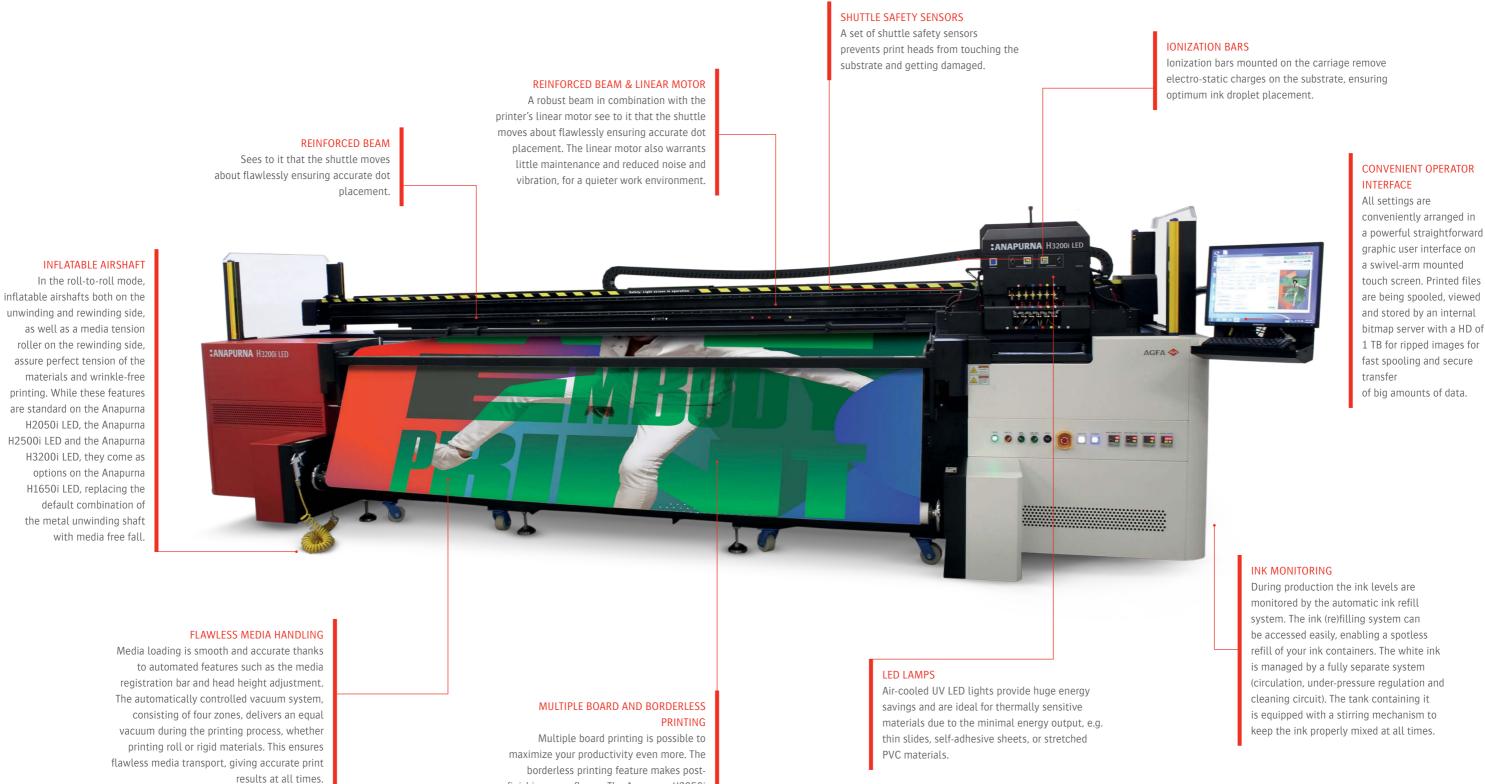

finishing superfluous. The Anapurna H2050i and H2500i LED can be equipped with an automatic board feeder for volume printing

of small board sizes—up to five boards in

parallel (four for the Anapurna H2050i LED).

#### EXTENDED MEDIA TABLES

The Anapurna H2050i LED, the Anapurna H2500i LED and the Anapurna H3200i LED come standard with an additional set of large media tables that are to be coupled to the default rigid tables. This makes it possible to print on rigids up to a length of 3.2 m. With the entry-level Anapurna H1650i LED, these additional large media tables can be acquired as an option.



# Agfa inkjet inks – always spot on

# Wide color gamut, no matter the medium

Agfa-made UV inks boast a wide color gamut and high color vibrancy in both indoor and outdoor applications. Providing outstanding adhesion—even on the most difficult substrates—these inks are your best option in terms of flexibility, image longevity and outdoor resistance. All of our UV inks—white and color—offer outstanding, stable jetting performance and deliver the same high-quality results, batch after batch.

# Agfa's UV-curable LED inks: always spot on

Relying on LED technology, our specially-formulated UV LED inks can print on heat-sensitive substrates, thus broadening the scope of possible applications. They are both customized and versatile, developed with a view of the many different media they are intended for, as well as the specifications of different print engines. Our inks for flexible media, for example, are perfectly suited for stretchable and bendable materials.

### Vivid prints, low ink consumption

Thanks to the high pigment load of our inks, ink consumption per square meter is the lowest on the market. This 'thin ink layer' pigment dispersion technology not only results in eye-catching prints; it also helps preserve the environment and saves on your budget. In short, these inks offer the best possible price/quality ratio.



In-house decoration – dibond



# Advanced white printing and white ink management

Printing on backlit media? Creating an opaque white background? Using white as a spot color? The hybrid Anapurna LEDs supports white printing in multiple modes (e.g. pre-white, post-white, sandwich white) on both rigid and roll media. The stirring functionality keeps the white ink in motion at all times. Constant recirculation flows along the ink lines—all the way to the temperature-controlled printer heads—limiting the risk of ink resettling and lines becoming blocked or clogged.



Outdoor communication - vinyl



# Powered by Asanti

The Anapurna hybrid printers are driven by Agfa's Asanti wideformat workflow software, which controls the entire printing process from prepress to production and finishing. As such, it simplifies, optimizes and automates as many steps as possible, offering you a high-performance solution for increased productivity.

# Accuracy and consistency

The huge variety of file types to be handled significantly slows down the processing of print jobs and often leads to errors. These difficulties are overcome with the Asanti software. As the print settings for different media are stored in a database, Asanti is able to quickly call up the appropriate specifications and apply them. Rendering, image and color quality are automated, and Asanti checks files prior to printing, ensuring layers and transparency have been handled correctly, while flagging potential issues. By dramatically simplifying the task of the operator, reducing idle time and efficiently tackling issues prior to printing, turnaround is reduced and productivity is increased.

# Intuitive GUI

The Asanti GUI works with improved visualization of the job layout and positioning: operators can see exactly what they are printing. The GUI offers access to key print parameters to make sure any last-minute changes are quick and easy to apply. Job preparation takes place independently from the Anapurna operation due to the client-server infrastructure. This complements the autonomy of the machine beautifully; ensuring operators are not tied to the printer when other tasks demand their attention.

## StoreFront

StoreFront, a comprehensive web-to-print service, is designed to handle incoming orders from the internet. Automated payment processing and error-free print preparation ensure new jobs are ready for printing in no time and with a minimum of operator intervention.



## Integrable with PrintSphere

As a highly-advanced printer powered by Asanti, the hybrid Anapurna LEDs integrate perfectly with PrintSphere, Agfa's cloud-based service for production automation, easy file sharing and safe data storage. This integrable cloud service offers a standardized way for print service providers to automate their workflows and facilitate data exchange with customers, colleagues, freelancers, other departments and other Agfa solutions.



## Extreme productivity. Extreme quality.

Reach new heights in printing quality and productivity for all your inkjet signs and displays. Go beyond current printing standards and produce extremely vivid prints at dazzling speeds. Experience the best of both worlds with Agfa. Outstanding quality has never come at a swifter pace.

Enter a new era of extreme productivity and quality with Agfa's inkjet printing solutions!

MODELS MEDIA & PRINTING SPECIFICATION	ANAPURNA H1650I LED ONS RIGID MEDIA	ANAPURNA H2050I LED	ANAPURNA H2500I LED	ANAPURNA H3200I LED
Maximum width	165 cm (5.4 ft) 160 cm (5.2 ft) with borderless printing	205 cm (6.7 ft) 200 cm (6.6 ft) with borderless printing	250 cm (8.2 ft) 247 cm (8.1 ft) with borderless printing	320 cm (10.5 ft) 316 cm (10.3 ft) with borderless printing
Maximum length	Supported by 1 rigid roller table: 140 cm (4.5 supported by 1 rigid roller table: 140 cm (4.5 supported by 1 rigid roller table + media exterm (default): 320 cm (10.5 ft)			
Minimum size	A2 landscape (60 x 42 cm – 1.5	97 x 1.4 ft)	(40.00.0, 40.00.0)	
Thickness	Minimum thickness: 1 mm (0.0 Maximum thickness: 45 mm (1	.77")		
	10 kg/m² on printing table (22	lb)		
MEDIA & PRINTING SPECIFICATI  Maximum width		205 cm (6.7 ft)	250 cm (8.2 ft)	320 cm (10.5 ft)
	n/a – restricted by weight and		200 0111 (0.12 10)	020 0111 (2010 10)
Thickness	Min. 0.2 mm			
Maximum weight	50 kg (110 lb)			0.31 kg (0.682 lb) per cm (0.4 roll width, meaning 100kg (220 lb) evenly distributed ov the full 3.2 m (10.5 ft) width Support for 3" core-media
Maximum roll outside diameter	Support for 3" core-media rolls with maximum outside diameter 36 cm (14.17")			rolls — maximum media roll diameter 30 cm (11.8") (larger diamete up to 50 cm (19.7") can be allowed within the distributed weight limitation, in case only print side OUT is used — both unwinder and winder)
Borderless printing flexible media	160 cm (5.2 ft)	200 (6.6 ft)	247 cm (8.1 ft)	316 cm (10.3 ft)
PRODUCTIVITY				
Draft mode	Up to 63 m <sup>2</sup> /h	Up to 104 m <sup>2</sup> /h	Up to 115 m <sup>2</sup> /h	Up to 129 m <sup>2</sup> /h
Diant illoue	(up to 678 ft <sup>2</sup> /h)	(Up till 1,119 ft <sup>2</sup> /h)	(up till 1,238 ft <sup>2</sup> /h)	(up to 1,388 ft <sup>2</sup> /h)
Express mode	44-54 m <sup>2</sup> /h (474-581 ft <sup>2</sup> /h)	64-71 m <sup>2</sup> /h (689-764 ft <sup>2</sup> /h)	70-78 m <sup>2</sup> /h (753-840 ft <sup>2</sup> /h)	77-87 m <sup>2</sup> /h (829-936 ft <sup>2</sup> /h)
Production mode	Up to 28 m <sup>2</sup> /h (301 ft <sup>2</sup> /h)	32-52 m <sup>2</sup> /h (344-560 ft <sup>2</sup> /h)	35-57 m <sup>2</sup> /h (377-614 ft <sup>2</sup> /h)	39-64 m <sup>2</sup> /h (420-689 ft <sup>2</sup> /h)
Standard mode	13-17 m <sup>2</sup> /h (140-183 ft <sup>2</sup> /h)	19-28 m <sup>2</sup> /h (204-301 ft <sup>2</sup> /h)	21-31 m <sup>2</sup> /h (226-334 ft <sup>2</sup> /h)	23-34 m <sup>2</sup> /h (248-366 ft <sup>2</sup> /h)
	Up to 7 m <sup>2</sup> /h (75 ft <sup>2</sup> /h)	14-15 m <sup>2</sup> /h (151-161 ft <sup>2</sup> /h)	16-17 m <sup>2</sup> /h (172-183 ft <sup>2</sup> /h)	9-19 m <sup>2</sup> /h (97-205 ft <sup>2</sup> /h)
PRINT HEADS & INKS	A 17 . AA: 1:			
Print heads	<ul> <li>4 Konica-Minolta         KM1024i-heads: 1024         nozzles/head with a         droplet volume of 12 pl         (colors)</li> <li>2 Konica-Minolta         KM1024i-heads: 30 pl         (white in line)</li> <li>Or 6 Konica-Minolta         KM1024i-heads: 1024         nozzles/head with a         droplet volume of 12 pl         (colors)</li> </ul>	6 Konica-Minolta KM1024i-heads: 1024 nozzles/head with a droplet volume of 12 pl (colors) 2 Konica-Minolta KM1024i-heads: 30 pl (white in line)		
Ink	Or CMYKLcLm Or CMYK + white	CMYKLcLm + white		
MAGE & TEXT QUALITY				
	Up to 720 x 1400 dpi			
· · · · ·	Positive: 4 point / Negative: 6	point		
Printer dimensions (H x W x L)	166 x 391 x 147 cm	177 x 450 * x 160 cm (70 x 177 * x 63") *without swivel arm	177 x 500 * x 160 cm (70 x 197 * x 63") *without swivel arm	177 x 572 x 193 cm (70 x 225 x 76") *without swivel arm
Weight	1,020 kg (2249 lb)	1,800 kg (3968 lb)	2,200 kg (4850 lb)	2,800 kg (6170 lb)
ELECTRICITY & COMPRESSED AI				· · · ·
Electricity	· ·	with Neutral wire (3 x 32 A) 50/		
	·	n without Neutral wire (3 x 32 A) 60 8573-1 2010), 160 l/min com		
Compressed air	Oil free (class 1 accommo to 1s	00 03/3-1 2010) 100 1/111111 (011)	Dressor with an inarrel towns	

www.agfa.com
© Copyright 2020 by Agfa NV, 2640 Mortsel, Belgium. All rights reserved.
AGFA and the Agfa rhombus are trademarks of Agfa-Gevaert NV, Belgium, or its affiliates. Anapurna, Asanti and PrintSphere are trademarks of Agfa NV, Belgium or its affiliates. All other brand and product names may be service marks or trademarks of their respective owners. All information contained in this document is intended for guidance purposes only, and